



## Prolunghe per utensili con cono Morse secondo le norme DIN 2187 completamente temperate e rettificate esternamente ed internamente

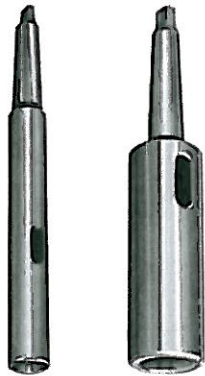


Codice per ordine	Cono Morse esterno	Cono Morse interno	a <sub>1</sub> mm	a <sub>2</sub> mm	d <sub>1</sub> mm	d <sub>2</sub> mm	d <sub>3</sub> mm	l <sub>1</sub> mm	l <sub>2</sub> mm	Tipo di confezione	Peso g
BL11145	1	1	-	7	12,065	12,065	20	145	83	Scatolate	190
BL12160		2				17,780	30	160	98		250
BL21160	2	1	-	9	17,780	12,065	20	160	85	Scatolate	340
BL22175		2				17,780	30	175	100		400
BL23196		3				23,825	36	196	121		550
BL31175	3	1	5	-	23,825	12,065	20	175	81	Scatolate	400
BL32194		2	-	9		17,780	30	194	100		840
BL33215		3	-	9		23,825	36	215	121		1000
BL34240		4	-	9		31,267	48	240	146		1300
BL41200	4	1	6,5	-	31,267	12,065	20	200	82,5	Scatolate	800
BL42215		2	6,5	-		17,780	30	215	97,5		850
BL43240		3	-	10,5		23,825	36	240	122,5		1500
BL44265		4	-	10,5		31,267	48	265	147,5		1900
BL45300		5	-	10,5		44,399	63	300	182,5		2750
BL51232	5	1	6,5	-	44,399	12,065	20	232	82,5	Scatolate	1600
BL52247		2	6,5	-		17,780	30	247	97,5		1600
BL53268		3	6,5	-		23,825	36	268	118,5		2840
BL54300		4	-	13,5		31,267	48	300	150,5		3310
BL55335		5	-	13,5		44,399	63	335	185,5		4200

## Prolunghe per utensili con cono Morse con soltanto il codolo trattato, rettificate esternamente ed internamente

Cono esterno Morse DIN 228

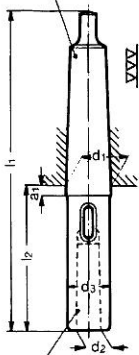

Cono interno Morse DIN 228

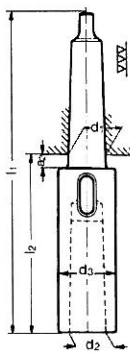

Codice per ordine	Cono Morse esterno	Cono Morse interno	a <sub>1</sub> mm	a <sub>2</sub> mm	d <sub>1</sub> mm	d <sub>2</sub> mm	d <sub>3</sub> mm	l <sub>1</sub> mm	l <sub>2</sub> mm	Tipo di confezione	Peso g
BL11145OT	1	1	-	7	12,065	12,065	20	145	83	Scatolate	190
BL12160OT		2				17,780	30	160	98		250
BL21160OT	2	1	-	9	17,780	12,065	20	160	85	Scatolate	340
BL22175OT		2				17,780	30	175	100		400
BL23196OT		3				23,825	36	196	121		550
BL31175OT	3	1	5	-	23,825	12,065	20	175	81	Scatolate	400
BL32194OT		2	-	9		17,780	30	194	100		840
BL33215OT		3	-	9		23,825	36	215	121		1000
BL34240OT		4	-	9		31,267	48	240	146		1300
BL41200OT	4	1	6,5	-	31,267	12,065	20	200	82,5	Scatolate	800
BL42215OT		2	6,5	-		17,780	30	215	97,5		850
BL43240OT		3	-	10,5		23,825	36	240	122,5		1500
BL44265OT		4	-	10,5		31,267	48	265	147,5		1900
BL45300OT		5	-	10,5		44,399	63	300	182,5		2750
BL51232OT	5	1	6,5	-	44,399	12,065	20	232	82,5	Scatolate	1600
BL52247OT		2	6,5	-		17,780	30	247	97,5		1600
BL53268OT		3	6,5	-		23,825	36	268	118,5		2840
BL54300OT		4	-	13,5		31,267	48	300	150,5		3310
BL55335OT		5	-	13,5		44,399	63	335	185,5		4200